

LMD Linears

Lexium MDrive® Linear Actuators —
integrated motor, electronics and linear mechanicals



NEMA 17 & 23 external linear shaft style



Intelligent motion systems



Description

OEMs who want to reduce machine size, cost and complexity will find robust Lexium MDrive Linear products deliver exceptional performance and value for many applications.



LMD Linear Actuator

integrated 1.8° 2-phase stepper motor with external shaft

Product offer

Lexium MDrive® Linear Actuator products integrate a 1.8° 2-phase stepper motor, external shaft linear mechanicals and drive electronics to deliver long life, high accuracy and repeatability in an extremely compact and low cost package. LMD linears may also include a fully programmable motion controller with on-board I/O, enabling stand-alone motion control without need of an external controller. Real time closed loop performance is available for enhanced performance and feedback.

Four (4) communication versions are available:

- Pulse/Direction: RS-422/485 serial interface products with 4 operating modes.
- Programmable Motion Control: RS-422/485 interface with programmable controller.
- CANopen: CANopen interface with programmable controller.
- Ethernet: supports user-selectable protocols Profinet, EtherNet/IP and ModbusTCP.

Closed loop products are equipped with 1000 line (4000 count/rev) encoders internal to the unit, requiring no extra space in an application. Encoders perform stall detection, position maintenance and find index mark, in addition to monitoring motor shaft position for real time closed loop feedback accomplished with hMTech technology.

Unlike traditional motor systems, hMT combines the best of servo and stepper motor technologies, while delivering unique capabilities and enhancements over both, including:

- real time closed loop control
- no loss of synchronization/stalling
- full use of motor torque
- torque mode control
- reduced motor heat (1)
- lower energy consumption (1)

Application areas

Lexium MDrive® Linear Actuator products are compact motion control solutions that can reduce system cost, design and assembly time for a wide range of linear motion applications. They are ideal for machine builders who want a robust motor with integrated electronics and linear mechanicals. Reduced system cabling can minimize problems due to electrical noise. While closed loop products deliver enhanced performance and provide a lower cost option to servo motors in many applications.

General features

- Integrated microstepping drive, 1.8° 2-phase stepper motor and linear mechanicals
 - Motor sizes NEMA 17 and 23, single stack length
- Fully programmable integrated motion controller in some versions
- Advanced current control for exceptional performance and smoothness
- +12 up to +60 VDC input power range
- Closed loop control with 1000 line internal encoder and hMTech technology (optional)
 - Prevents motor stalling while delivering numerous performance advantages
 - Variable current control reduces motor heat and lowers energy consumption
- Protection IP20 rating
- 20 microstep resolutions to 51,200 steps/rev including: Degrees, Metric, Arc Minutes
- 0 to 2.56 MHz step clock rate selectable in 0.59 Hz increments
- Graphical user interface provided for quick and easy parameter setup
- Cost effective
- Extremely compact
- Custom products available

(1) Achieved with hMTech variable current control.



LMD-42 linear actuator:
NEMA 17, external shaft

2 connector options



LMD-57 linear actuator:
NEMA 23, external shaft

2 connector options

Specifications


			Linear LMD•42 (NEMA17)	Linear LMD•57 (NEMA23)	
Input power	Voltage		+12 ...+48 VDC	+12 ...+60 VDC	
	Current maximum (1)		2.0 A	3.5 A	
Motor	Frame size	NEMA	17	23	
		inches	1.7	2.22	
		mm	42.7	56.4	
	Length	stack size	single	single	
Maximum thrust (2)	General purpose nut	lbs	25	60	
		kg	11	27	
	Anti-backlash nut	lbs	5	25	
		kg	2	11	
Repeatability	Maximum	inch	0.005	0.005	
		mm	0.127	0.127	
Weight (without screw)			oz/g	13.6 / 385	24.8 / 703
Step angle α			°	1.8	1.8
Thermal	Operating temp non-condensing	Heat sink maximum	85°C		
		Motor maximum	100°C		
Protection	Type	Temp warning	0 ... 84°C, user selectable		
		Earth grounding	via product chassis ground lug		
		IP rating	IP20		
Communication versions	Pulse/Direction		RS-422/485		
	Programmable Motion Control		RS-422/485 programmable with stored memory		
	CANopen		CANopen interface with programmable controller		
	Ethernet		EtherNet/IP, Profinet, ModbusTCP		

(1) Actual power supply current will depend on voltage and load.

(2) Performance data for maximum force/load is based on a static load and will vary with a dynamic load.

An optional Communication Converter is recommended with first orders.

Motor types

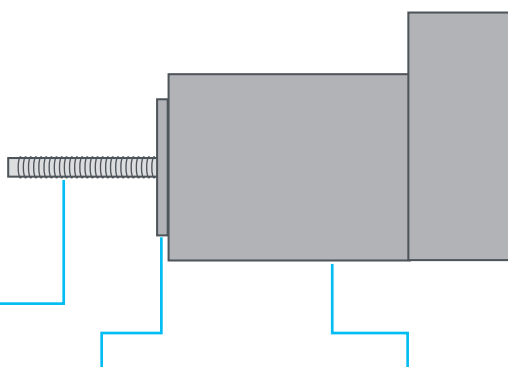


Lead screw		Centering collar	Flange size	Winding	Motor length – excluding screw & connectors
Size 42 – NEMA 17					
Acme-style lead screw with end finish options	Ø 0.25" / Ø 2.0 mm	Ø 0.87" / Ø 22.0 mm	NEMA 17 1.7" / 42.7 mm	2-phase full coil for bi-polar operation	2.40" / 61.0mm with pluggable connector option 2.78" / 70.7 mm with M12 circular connector option
Size 57 – NEMA 23					
Acme-style lead screw with end finish options	Ø 0.375" / Ø 9.525 mm	Ø 1.50" / Ø 38.0 mm	NEMA 23 2.22" / 56.4 mm	2-phase full coil for bi-polar operation	3.17" / 80.5mm with pluggable connector option 3.32" / 84.3 mm with M12 circular connector option

LMD Linear Actuator

integrated 1.8° 2-phase stepper motor with external shaft


Dimensions in inches (mm), unless specified

LMD•42 Linear – external shaft, NEMA size 17

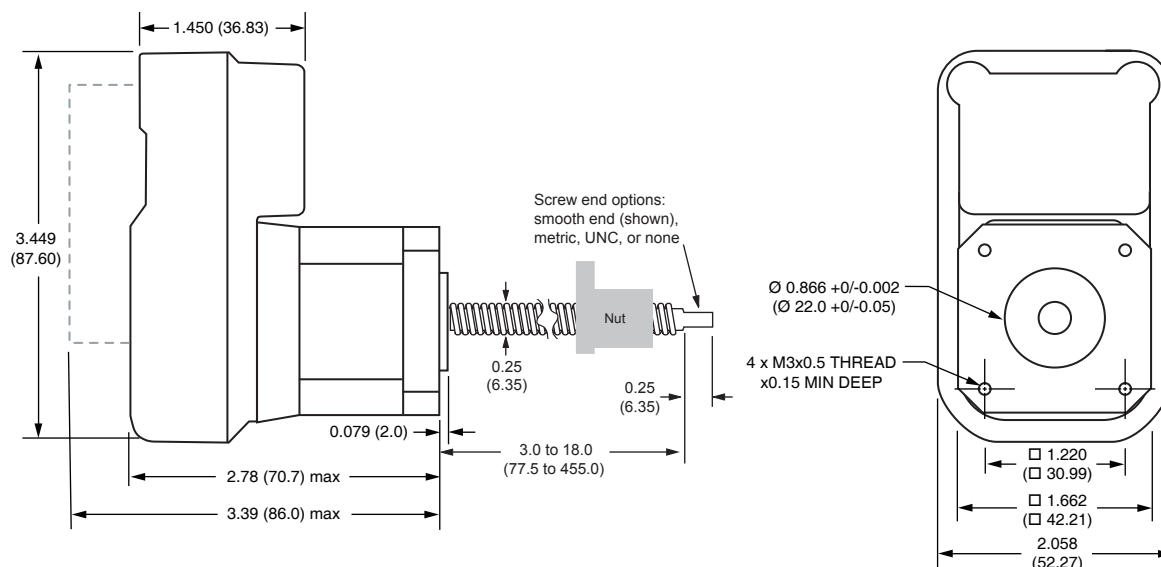


NOTE
Cantilevered loads
MUST BE supported.
Side loading is not
recommended.

Nut specifications




General purpose nut

For applications not requiring anti-backlash and wear compensation
Flange shape: round



Anti-backlash nut

Purpose: backlash free operation for high accuracy and low drag torque.
Flange shape: triangle






inches (mm)	A	B	D	E	F	BCD	drag torque
<i>General purpose</i>	0.50 (12.7)	0.75 (19.1)	1.0 (25.4)	0.14 (3.6)	0.15 (3.81)	0.75 (19.1)	free wheeling
<i>Anti- backlash</i>	0.50 (12.7)	0.9 (22.86) max	1.0 (25.4)	0.143 (3.63)	0.18 (4.57)	0.75 (19.1)	< 1.0 oz-in < 0.7 N-cm

Lead screw specifications

Travel	Per revolution		Screw A 0.25" / 6.35 mm	Screw B 0.125" / 3.175 mm	Screw C 0.063" / 1.588 mm
	Per full step		0.00125" / 0.0317 mm	0.00063" / 0.0158 mm	0.00031" / 0.0079 mm
Load limit*	External shaft nuts	General purpose	25 lbs / 11 kg		
		Anti-backlash	5 lbs / 2 kg		


*Performance data for maximum force/load is based on a *static* load and will vary with a *dynamic* load.

<p>Threaded end</p> 	<p>Metric end: M4 x 0.7mm thread to within 0.03"/ 0.76 mm of shoulder</p>	<p>UNC end: #8-32 UNC-2A thread to within 0.03"/ 0.76 mm of shoulder</p>
<p>Smooth end</p> 	<p>Ø 0.1967" ±0.001 Ø 5 mm ±0.003</p>	
<p>None</p> 	<p>—</p>	

Speed-force curves


12 VDC

Force in lbs / kg

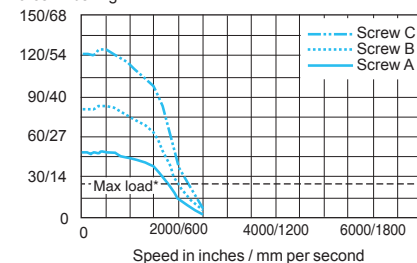


24 VDC

Force in lbs / kg

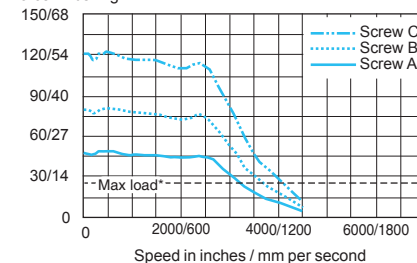

48 VDC

Force in lbs / kg

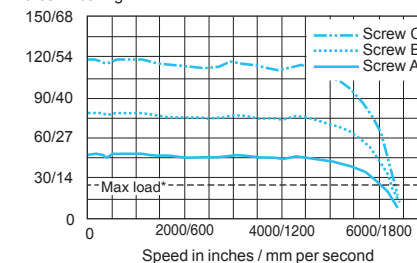

*Load limit is determined by selected nut. Performance data for maximum force/load is based on a *static* load and will vary with a *dynamic* load.

LMD Linear Actuator

integrated 1.8° 2-phase stepper motor with external shaft



Part numbers	
Example	L M D C M 4 2 1 P -LA 3 M 0 6 0 G T
Product LMD = Lexium MDrive, with linear actuator external shaft	L M D C M 4 2 1 P -LA 3 M 0 6 0 G T
Control type C = Closed loop / with hMT and encoder (1) O = Open loop / no hMT or encoder	L M D C M 4 2 1 P -LA 3 M 0 6 0 G T
Communication type P = Pulse/Direction via RS-422/485 serial interface M = Programmable Motion Control via RS-422/485 serial interface A = CANopen interface E = EtherNet/IP, ModbusTCP, Profinet, MCode/TCP	L M D C M 4 2 1 P -LA 3 M 0 6 0 G T
Flange size 42 = NEMA 17 / 42mm 57 = NEMA 23 / 57mm	L M D C M 4 2 1 P -LA 3 M 0 6 0 G T
Motor length 1 = single stack	L M D C M 4 2 1 P -LA 3 M 0 6 0 G T
Connector style P = pluggable connectors, IP20 rating C = M12 circular connectors, IP20 rating	L M D C M 4 2 1 P -LA 3 M 0 6 0 G T
Lead screw size 42/NEMA17: size 57/NEMA23: -LA = 0.25"/6.35 mm -LG = 0.375"/9.525 mm -LB = 0.125"/3.175 mm -LA = 0.20"/5.08 mm -LC = 0.063"/1.588 mm -LB = 0.167"/4.233 mm -LD = 0.083"/2.116 mm	L M D C M 4 2 1 P -LA 3 M 0 6 0 G T
Shaft style 3 = external shaft	L M D C M 4 2 1 P -LA 3 M 0 6 0 G T
Screw end finish M = metric U = UNC S = smooth Z = none	L M D C M 4 2 1 P -LA 3 M 0 6 0 G T
Screw length (2) lengths available in 0.1" increments 030 = 03.0" / 76 mm minimum 180 = 18.0" / 457 mm maximum (for size 42/NEMA17) 240 = 24.0" / 610 mm maximum (for size 57/NEMA23)	L M D C M 4 2 1 P -LA 3 M 0 6 0 G T
Nut G = general purpose A = anti-backlash	L M D C M 4 2 1 P -LA 3 M 0 6 0 G T
Screw coating T = Teflon® Z = none	L M D C M 4 2 1 P -LA 3 M 0 6 0 G T

(1) Closed loop control delivers encoder feedback and hMT enhanced motor performance.

(2) To calculate screw length: screw length = [desired stroke length] + [nut length] + [mounting surface plate thickness]

Accessories

LMD Linear Actuator

integrated 1.8° 2-phase stepper motor with external shaft



MD-CC404-000



MD-CC501-000



MD-CC405-000



MD-CC502-000



MD-CS600-000



MD-CS620-000



MD-CS630-000



MD-CS610-000



MD-CS640-000



MD-CS650-000



PLG-M12TP

MD-CS660-000



ICP0531

for pluggable connector products

description	length feet (m)	part number	comm types (1)			
			P	M	A	E
USB-pluggable converter to set/program communication parameters in 32- or 64-bit						
Mates to DB9 connector	6.0 (1.8)	MD-CC404-000	•	•		
Mates to DB9 connector. Includes: CAN dongle, terminating resistor, and pre-wired mating cables	6.0 (1.8)	MD-CC501-000			•	

Replacement mating connector kits

Includes one 2-pin power mate, and one set (2 pieces) 7-pin multifunction mates	—	CK-14	•			
Includes one 2-pin power mate, and one set (2 pieces) 7-pin multifunction mates	—	CK-15		•	•	•

for M12 circular connector products

description	length feet (m)	part number	comm types (1)			
			P	M	A	E
USB-pluggable converter to set/program communication parameters in 32- or 64-bit						
Mates to M12 5-pin female connector	6.0 (1.8)	MD-CC405-000	•	•		
Mates to M12 5-pin male connector. Includes: CAN dongle, terminating resistor, and pre-wired mating cables	6.0 (1.8)	MD-CC502-000			•	

Cordsets

Shielded cables pre-wired with straight M12 mating connectors

Communication cordset mates to 5-pin female connector	10.0 (3.0)	MD-CS600-000	•	•		
Power cordset mates to 4-pin male connector	10.0 (3.0)	MD-CS620-000	•	•	•	•
I/O cordset mates to 12-pin female connector	10.0 (3.0)	MD-CS630-000	•			
I/O cordset mates to 12-pin male connector	10.0 (3.0)	MD-CS610-000		•	•	•
Communication cordset mates to 4-pin female connector	6.5 (2.0)	MD-CS640-000				•
Communication cordset mates to 5-pin male connector	10.0 (3.0)	MD-CS650-000				

Daisy chaining

Connect multiple units together in sequence with Y cable. Termination plug, sold separately, is required at end of run.

Y cable mates to M12 communication connector	0.3 (1.0)	MD-CS660-000			•	
M12 bus termination (resistor) plug	—	PLG-M12TP			•	

(1) Communication types:

P = Pulse/Direction via RS-422/485 serial interface

M = Programmable Motion Control via RS-422/485 serial interface

A = CANopen interface

E = EtherNet/IP, ModbusTCP, Profinet, MCode/TCP

for all products with Absolute Encoder

description	length feet (m)	part number
Extend stored position data up to 5-years for 1 to 6 LMD units		
Battery pack, DIN-rail mount. Uses 3 AA batteries, not provided	—	ICP0531
LMD mating cable(s) with crimp connector to flying lead end	3.3 (1.0)	PD02-0531-FL1
PLC mating cable with crimp connector to flying lead end	3.3 (1.0)	PD04-0531-FL1

USA SALES OFFICES

East Region

Tel. 610-573-9655

e-mail: e.region@imshome.com

Northeast Region

Tel. 860-368-9703

e-mail: n.region@imshome.com

Central Region

Tel. 630-267-3302

e-mail: c.region@imshome.com

Western Region

Tel. 602-578-7201

e-mail: w.region@imshome.com

EUROPEAN SALES MANAGEMENT

Tel. +33/4 7256 5113 – Fax +33/4 7838 1537

e-mail: europa.sales@imshome.com

TECHNICAL SUPPORT

Tel. +00 (1) 860-295-6102 – Fax +00 (1) 860-295-6107

e-mail: etech@imshome.com

Schneider Electric Motion USA

370 N. Main Street
Marlborough, CT 06447 USA

www.motion.schneider-electric.com

Owing to changes in standards and equipment, the characteristics given in the text and images in this document are not binding until they have been confirmed with us.

Print: Schneider Electric Motion USA

Photos: Schneider Electric Motion USA